

# LIGHT EFFICIENT DESIGN PRODUCT SPOTLIGHT



## LED BOLLARD RETROFIT LAMP

- Field adjustable light output
- Change color temperature with the flip of a switch
- Engineered to work efficiently in enclosed fixtures & damp environments while protected against insects & dust
- Multi-directional mounting capability & 360 degree design
- Dimmable
- Ballast bypass
- 50,000 hour rated life
- 5-year warranty




Change color with the flip of a switch



ITEM #	WATTS	LUMENS	KELVINS	VOLTS	BASE	REPLACES
1864790	12/18/24	1550-3360	3000/4000/5000	120-277	E26 Medium	70W/100W/150W
1864791	12/18/24	1550-3360	3000/4000/5000	120-277	EX39 Mogul	70W/100W/150W

## LED POST TOP RETROFIT LAMP

- Field adjustable light output
- Change color temperature with the flip of a switch
- Advanced active cooling
- Multi-directional mounting capability & 360 degree design
- Dimmable
- Ballast bypass
- 50,000 hour rated life
- 5-year warranty



Switch between Wattages and Color Temps



ITEM #	WATTS	LUMENS	KELVINS	VOLTS	BASE	REPLACES
1794912	35/45/60	5140-8870	3000/4000/5000	120-277	E26 Medium	175W/250W/320W
1795356	80/100/110	11370-15730	3000/4000/5000	120-277	EX39 Mogul	320W/400W

## LED HAZARDOUS FIXTURE RETROFIT LAMP

- Rated for Class 1 Div 2 installations
- Advanced active cooling
- Ballast bypass
- 50,000 hour rated life
- Limited 5-year warranty



ITEM #	WATTS	LUMENS	KELVINS	VOLTS	BASE	REPLACES
1240121	24	3425	5700	120 - 277	E26 Medium	Up to 150W HID
1240120	24	3425	5700	120 - 277	EX39 Mogul	Up to 150W HID

## WHAT'S CONSIDERED A HAZARDOUS LOCATION?

Hazardous locations are defined in terms of Class, Division and Group, per the NEC.

The definition of each is as follows:

- **CLASS I** locations are those in which flammable gases or vapors are or may be present in the air in quantities sufficient to produce explosive or ignitable mixtures.
- **DIVISION 2** is an environment that is not normally hazardous. Each Division may be further classified according to the particular gas, vapor or dust by defining the areas by Groups.

CLASS I, DIVISION 2 HAZARDOUS ATMOSPHERE			
NEC CLASS	DIVISION	GROUP	TYPICAL ATMOSPHERE AND AUTOIGNITION TEMPERATURES
I Gases, Vapors	2 Not normally hazardous	A	Acetylene (305°C, 581°F)
		B	Hydrogen (502°C, 986°F) manufactured gases containing more than 30% hydrogen (by volume)
		C	Ethylene (450°C, 842°F) Cyclopropane (503°C, 938°F)
		D	Hexane (225°C, 437°F) Butane (288°C, 550°F) Propane (450°C, 842°F) Acetone (465°C, 869°F) Benzene (420°C, 788°F) Gasoline (280-471°C, 536-880°F)




REXELUSA.COM

Live Chat · Identify Parts · Spec Sheets · Check Stock



GEXPRO.COM

# LIGHT EFFICIENT DESIGN PRODUCT SPOTLIGHT

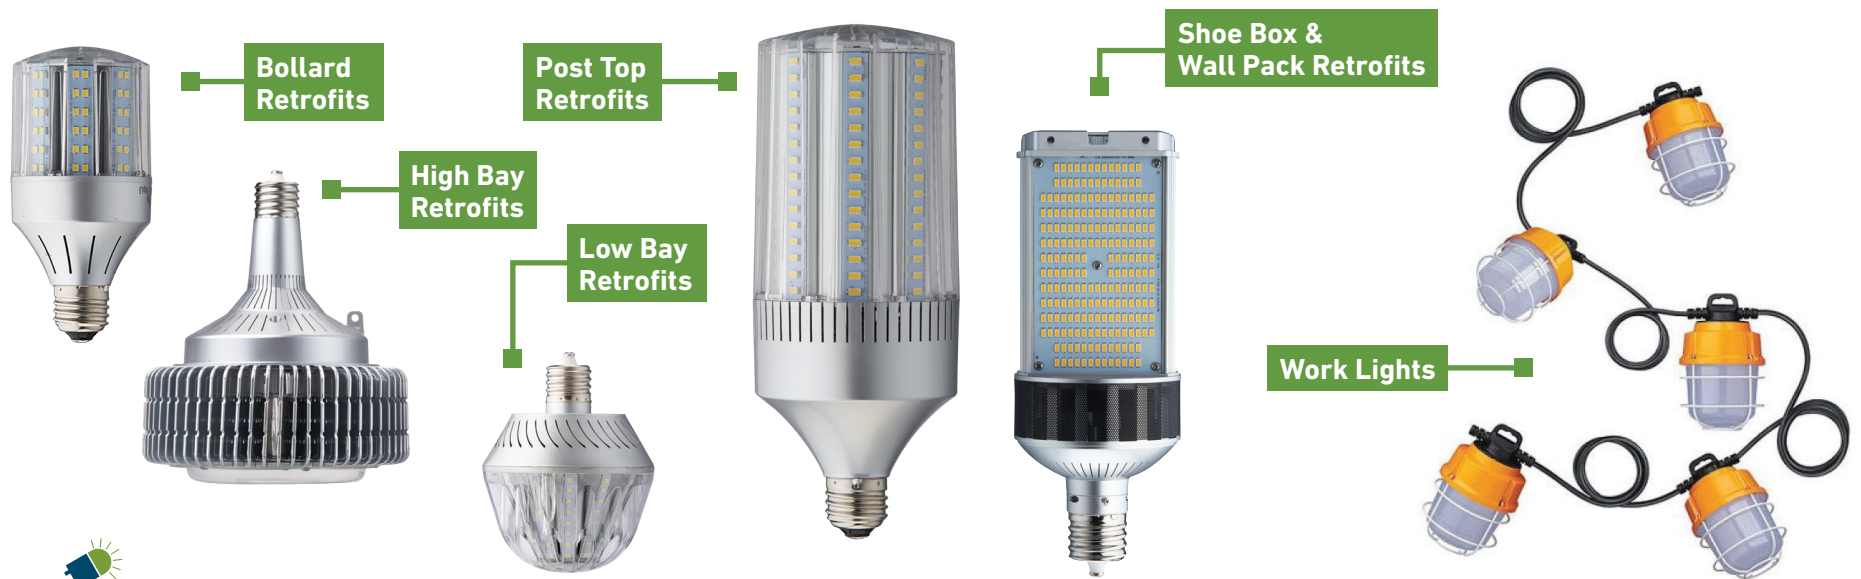

PRODUCT TYPE	ITEM #	WATTS	LUMENS	KELVINS	VOLTS	BASE	REPLACES
Bollard Retrofits	<b>1703607</b>	14	1850/1950/1990	3000/4000/5000	120 - 277	E26	70W HID
	<b>1703608</b>	18	2450/2560/2610	3000/4000/5000	120 - 277	E26	100W HID
	<b>986291</b>	18	2243	5700	120 - 277	E26	100W HID Equivalent
	<b>1707060</b>	24	3170/3332/3360	3000/4000/5000	120 - 277	EX39	150W HID
High Bay Retrofits	<b>1346332</b>	90	11825	4000	120 - 277	EX39	250W HID
	<b>1346336</b>	135	17055	4000	120 - 277	EX39	400W HID
	<b>1156678</b>	140	16000	4000	120 - 277	EX39	320W or 400W MH
	<b>1346334</b>	150	19285	4000	120 - 277	EX39	400W HID
Low Bay Retrofits	<b>1346441</b>	45	5334	4000	120 - 277	EX39	175W HID equivalent
Post Top Retrofits	<b>1156685</b>	18	2055	3000	120 - 277	E26	70W HID equivalent
	<b>958390</b>	18	1956	4200	120 - 277	E26	70W HID equivalent
	<b>1156686</b>	24	3431	3000	120 - 277	E39	100W HID equivalent
	<b>1208273</b>	24	3374	4000	120 - 277	E39	100W HID equivalent
	<b>980698</b>	24	3422	4000	120 - 277	E26	100W HID equivalent
	<b>1142985</b>	35	5468	4000	120 - 277	E26	175W HID equivalent
	<b>1240118</b>	45	6062	3000	120 - 277	E26	250W HID
	<b>1148919</b>	45	5923	4000	120 - 277	EX39	Up to 250W HID
	<b>1130147</b>	45	5913	5700	120 - 277	E39	Up to 250W HID
	<b>1240109</b>	65	9499	5700	120 - 277	E39	Up to 250W MH or HPS
	<b>1147867</b>	100	10603	3000	120 - 277	E39	400W MH or HPS HID
Shoe Box & Wall Pack Retrofits	<b>1794911</b>	35/45/60	5140-8870	3000/4000/5000	120 - 277	E26	175W/250W/320W HID
	<b>1334883</b>	50	6250	5000	120 - 277	E26	175W MH or HPS HID
	<b>907250</b>	50	5870	5700	120 - 277	E39	175W HID equivalent
	<b>1346347</b>	110	13750	4000	120 - 277	EX39	400W HID
Temporary Work Site Lights	<b>1337905</b>	110	13750	5000	120 - 277	EX39	Up to 400W HID
	<b>1650365</b>	40	5000	5000	120	N/A	300W Incandescent
	<b>1240106</b>	100	11000	5000	120	N/A	Up to 400W HID



REXELUSA.COM

Live Chat · Identify Parts · Spec Sheets · Check Stock



GEXPRO.COM